
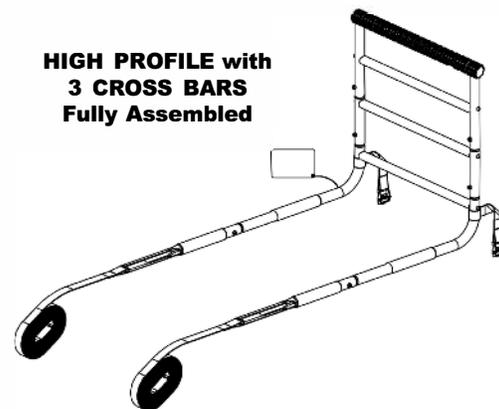
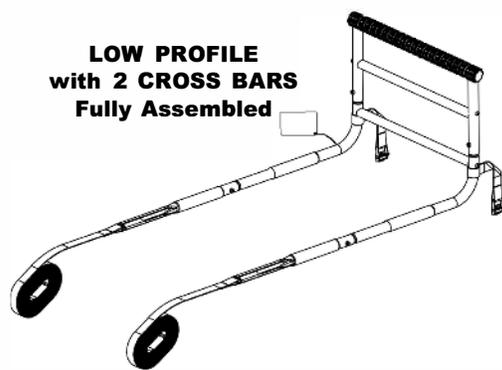


## Table of Contents


- Warnings and Cautions for APBRs (3 Pages)
- Entrapment Prevention Information (2 Pages)
- HMSG450 Installation Instruction (3 Pages)

# ASSEMBLY & INSTALLATION

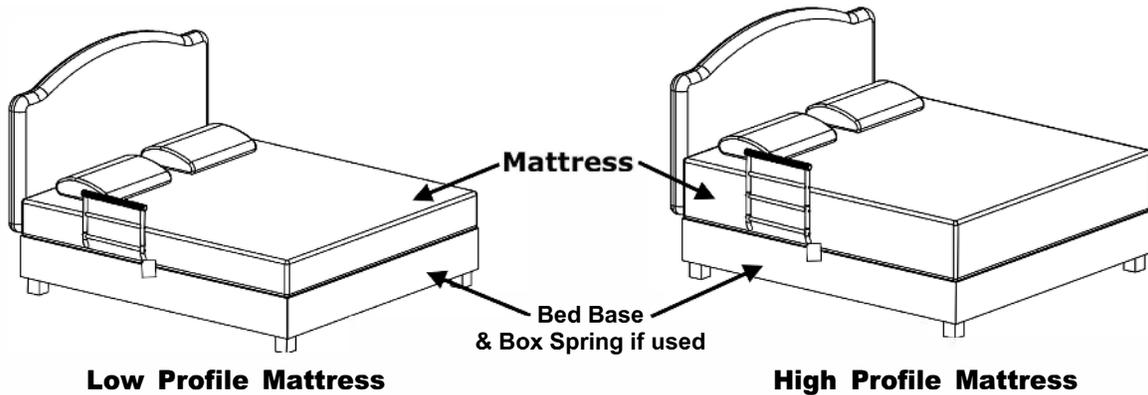

## KIT CONTENTS

- A. 2 x Strap Tubes
- B. 2 x Under Mattress Tubes. (Warning Tag on right side only)
- C. 1 x Lower Cross Bar
- D. 1 x H-Bar Height Extension Assembly
- E. 1 x SafetyGrip® Hand Rail
- F. 2 x Long Screws for Part C
- G. 1 x Hex Key

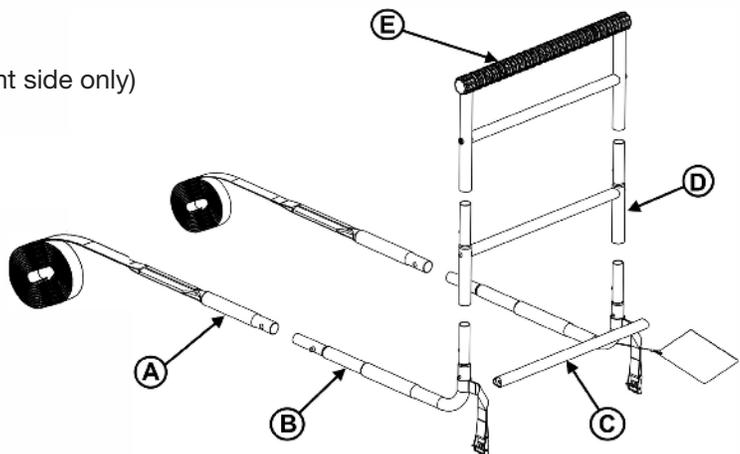

## Product Information and Specifications

Product Name: HMSG450 Morpheus Hand Rail


Maximum User Weight: 300 lbs (135 kgs.) **IMPORTANT:** NOT intended to support the full weight of the user.

Cleaning: Use a damp cloth with soap and water or a mild household cleaner. Wipe clean and dry before using.


**Installer Quick Tip:** If you have any difficulty assembling the parts and snap-locking them together, loosen the screws on one side of Parts C and D using the hex key provided. After fully assembling, tighten all screws securely.

### STEPS:


1. Open the carton and remove all parts. Remove all coverings and dispose of safely away from children and infants.
2. The SafetyGrip Hand Rail can be used with either 2 Cross Bars or 3 Cross Bars. For mattresses 6 to 10 inches thick, you can choose to use either 2 or 3 Cross Bars. For mattresses between 11 and 16 inches thick, you must use 3 Cross Bars. The top of the SafetyGrip Bedside Hand Rail must be at least 4 inches above the top surface of the mattress. If you choose to use 2 Cross Bars, discard part D H-Bar.

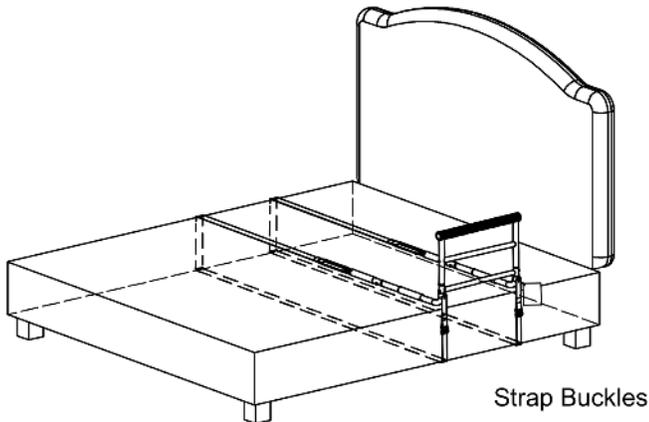


**Low Profile  
Mattress Removed**

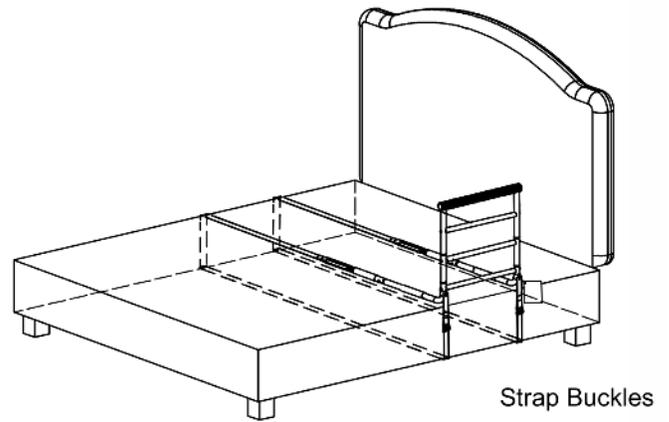


**High Profile  
Mattress Removed**

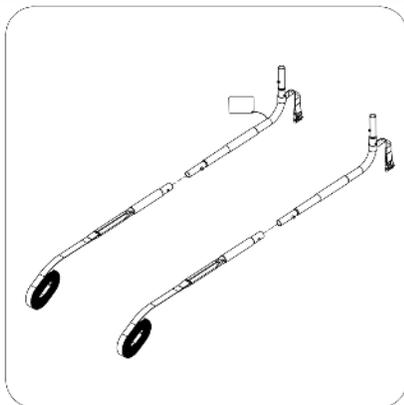


3. Snap-Lock part A onto part B  
both sides

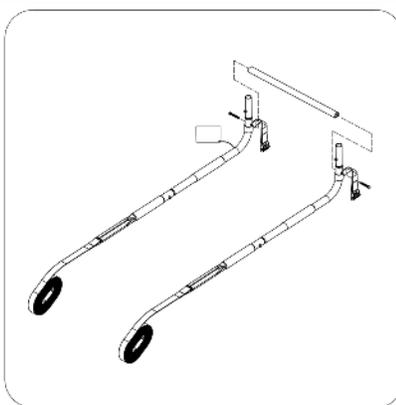


4. Screw part C onto parts B.  
Leave the screws loose

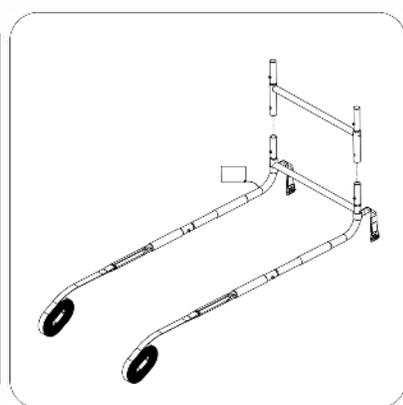

5. For High Profile: snap-lock  
part D onto part B

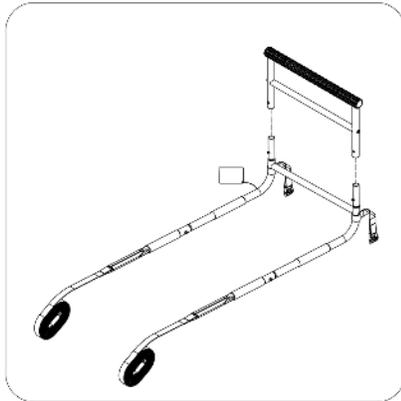

6. For Low Profile: snap-lock parts E onto part B

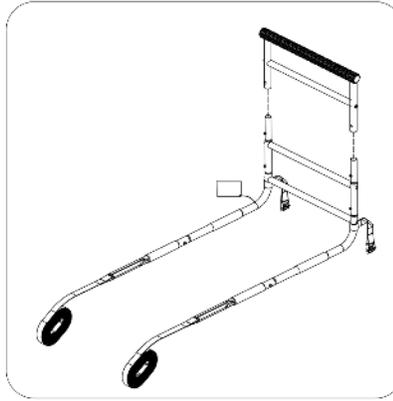

7. For High Profile: snap-lock parts E onto part D

8. Remove the mattress.
9. With the mattress removed, sit the assembled SafetyGrip Hand Rail on top of the bed base and/or box spring if the bed has a box spring.
10. Run the long strap on Part A across the top of the bed frame and/or box spring to the other side of the bed. Then go underneath the bed base and back to the SafetyGrip Hand Rail.
11. Position the SafetyGrip Hand Rail away from the head board where it is most comfortable to use.  
**IMPORTANT:** the distance from the headboard, and footboard, if the bed has one, to the closest part of the SafetyGrip Hand Rail must be more than 12 ½ inches.
12. Feed the strap through the buckle on the short strap. Tighten the strap securely and close the buckle to secure the strap.
13. Put the mattress back onto the bed.
14. Loop and double tie the ends of the long straps below the buckles. Cut off any excess straps to prevent a tripping hazard.